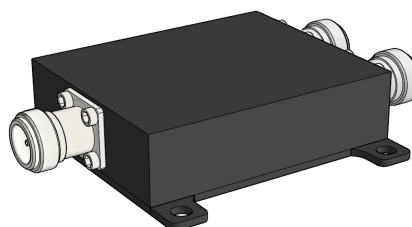


2 Way Low Power Splitter,700-2700MHz,NF**Specifications**

General Specification	
Application	Indoor/Outdoor
Color	Black
Inner Contact Plating	Silver
Interface	N female
Outer Contact Plating	Tri metal
Housing	Passivated Aluminum or powder paint
Dimensions	
Length*Width*Height	107 mm * 79 mm * 22 mm
Weights	
Weight, net	0.24 kg
Electrical Specification	
PIM, Passive IM	-130 dBc, 2x43 dBm
Power Rating, Max	50 W
Impedance	50 ohm
Frequency Range	700-2700 MHz
VSWR	1.25
Split	2
Isolation, Typ.	20 dB
Insertion Loss, Max	0.4 dB
Split Loss	3 dB
Power Combing	0.5 W
Reflected Power	3 W
DC capability	DC transmission between all ports

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

2 Way Low Power Splitter,700-2700MHz,NF

Environmental Specification

Temperature Range	-35 °C to +75 °C
Ingress Protection Test Method	IP65
Regulatory Compliance	
ROHS	Compliant