
S2-038270-DF

Eternal-HJY

2 Way High Powe Splitter, 380-2700MHz, DF

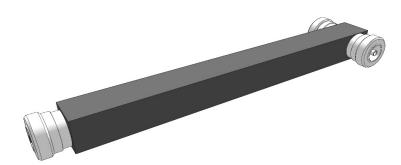

Specifications

| General Specification | |
|--------------------------|---|
| Application | Indoor/Outdoor |
| Color | Black |
| Inner Contact Plating | Silver |
| Interface | 7/16 Din female |
| Outer Contact Plating | Tri metal |
| Housing | Passivated Aluminum or powder paint |
| Mounting | Bracket for wall mounting included in the scope of supply |
| Dimensions | |
| Length*Width*Height | 285 mm * 64.2 mm * 25 mm |
| Weights | |
| Weight, net | 0.61 kg |
| Electrical Specification | |
| PIM, Passive IM | -150 dBc, 2x43 dBm |
| Power Rating, Max | 300 W; 3 KW Peak |
| Input Impedance | 50 ohm |
| Frequency Range | 380-2700 MHz |
| VSWR, Max | 1.25 |
| Split | 2 |
| Dissipative Loss | 0.2 dB |
| Split Loss | Silver |
| DC Capability | DC transmission between all ports |
| | |

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

S2-038270-DF

2 Way High Powe Splitter, 380-2700MHz, DF

Environmental Specification

| Temperature Range | -35 °C to +75 °C |
|--------------------------------|------------------|
| Ingress Protection Test Method | IP65 |
| Regulatory Compliance | |
| ROHS | Compliant |