


## Power Tapper 5dB, 350-2700MHz,NF

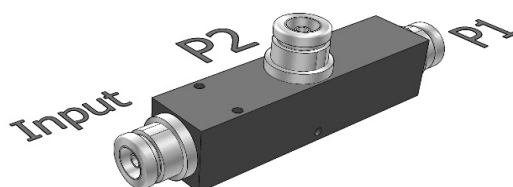

## Specifications

|                          |                                                |
|--------------------------|------------------------------------------------|
| General Specification    |                                                |
| Application              | Indoor/Outdoor                                 |
| Color                    | Black                                          |
| Inner Contact Plating    | Silver                                         |
| Interface                | N female                                       |
| Outer Contact Plating    | Tri metal                                      |
| Housing                  | Passivated Aluminum or powder paint            |
| Dimensions               |                                                |
| Length*Width*Height      | 140.4 mm * 43 mm * 25 mm                       |
| Weights                  |                                                |
| Weight, net              |                                                |
| Electrical Specification |                                                |
| PIM, Passive IM          | -153 dBc, 2x43 dBm                             |
| Power Rating, Max        | 200 W avg.                                     |
| Impedance, nominal       | 50 ohm                                         |
| Frequency Range          | 350-960 MHz / 1710-2700 MHz                    |
| Coupling                 | 5 dB                                           |
| Variation                | ± 1.2 dB @ 350-960 MHz                         |
|                          | ± 0.8 dB @ 1710-2700 MHz                       |
| VSWR, Max                | 1.35 @ 350-960 MHz                             |
|                          | 1.25 @ 1710-2700 MHz                           |
| DC Capability            | DC transmission only between input and port P1 |
|                          | P2 is coupled capacitive                       |

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

---

**Power Tapper 5dB, 350-2700MHz,NF****Environmental Specification**

|                                       |                  |
|---------------------------------------|------------------|
| <b>Temperature Range</b>              | -35 °C to +85 °C |
| <b>Ingress Protection Test Method</b> | IP65             |
| <b>Regulatory Compliance</b>          |                  |
| <b>ROHS</b>                           | Compliant        |