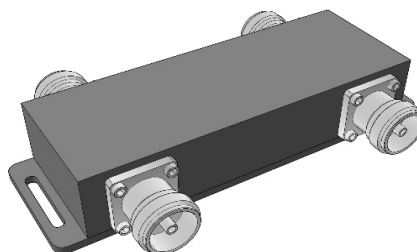


3dB Hybrid Coupler, 700-2700MHz, 4.3-10**Specifications**

General Specification	
Application	Indoor/Outdoor
Color	Black
Inner Contact Plating	Silver
Interface	4.3-10 female
Outer Contact Plating	Tri metal
Housing	Passivated Aluminum or powder paint
Dimensions	
Length*Width*Height	146 mm * 86 mm * 28 mm
Weights	
Weight, net	
Electrical Specification	
PIM, Passive IM	-153 dBc, 2x43 dBm
Power Rating, Max	200 W avg.
Impedance, nominal	50 ohm
Frequency Range	700-2700 MHz
VSWR, Max	1.25, All Ports
Coupling	3.1 ± 0.5 dB
Input Isolation, Min	23 dB
Insertion Loss, Max	0.2 dB
DC Capability	DC transmission only between cross ports

3dB Hybrid Coupler, 700-2700MHz, 4.3-10**Environmental Specification**

Temperature Range	-30 °C to +85 °C
Ingress Protection Test Method	IP65
Regulatory Compliance	
ROHS	Compliant